



D9 series



Ideal option for schools / charters / mining

Quality meets value

Air suspension with ECAS

Reclining seats for greater comfort

Electro plated for maximum corrosion resistance

Aluminium wheels

Seats 39–43

vdiaustralia.com.au
yutong.com.au



D9 series

MODEL

ZK6938H

SEAT CONFIGURATIONS

1 x Drivers suspension seat with lap sash belt & head rest
43 x fixed ADR68 seat belted seats in cloth
39 x reclining ADR68 seat belted seats in cloth

STANDARD VEHICLE CONFIGURATION

39 x reclining ADR68 seat belted seats in cloth
Two piece windscreen
Electric controlled mirrors with heating
Ducted cool only control air conditioning with individual outlets
Bonded dark glass to Sallon area
Frame & body panels steel fully vehicle electro plating for anti corrosion
Reverse Camera with colour Screen on dash
Integrated audio system with Radio, CD / DVD, P.A.
Passenger door system with passenger entrapment sensor
Luggage compartment with 2 door per side

DIMENSIONS

Length	9,400mm
Width	2,500mm
Hight	3,440mm
Wheel Base	4,600mm
Overhang Front / Rear	1,935mm / 2,760mm
Track Front / Rear	1,860mm / 1,640mm

GROSS VEHICLE MASS

GVM (Maximum Permissible)	13,800 kg
GCM (Maximum Permissible)	16,800 kg

ENGINE

Engine Arrangement	Rear
Emission Type	Euro V & VI
Model	Cummins ISB6.7E5250
Engine Type	6 Cylinders, Turbocharged & Charge Air Cooled
Bore & Stroke	107mm (4.21in) x 124mm (4.88 in)
Displacement	6700cc
Rate Output	184kw (250hp) @ 2500 RPM
Rated Torque	950 Nm / 1100-1600 RPM
Compression Ratio	17.1:1
Fuel Injection	Common Rail
Maximum Speed	100 Km/h

TRANSMISSION

Make	Allison
Model	T350R
	1st - 3.49
	2nd - 1.86
	3rd - 1.41
	4th - 1.00
	5th - 0.75
	6th - 0.65
	Reverse - 5.03

INSTRUMENTATION

Tachometer, Air pressure, cruise control
Speedometer, Fuel, Coolant temperature
Oil Pressure, Adblue

WARNING SYSTEM

Oil Light & audible, Water Light and audible, Air Light
& audible, Indicator light, Hazard light, Charge light
Parking brake Light, High beam light, Adblue light,
Engine fault light.

AIR CLEANER

Dry element

PROPELLER SHAFT

2 piece with slip joint
Forged ends with "U" joint at each end

REAR AXLE

Type	Full Floating banjo
Capacity	9,500 kg
Gear Ratio	5.13:1

STEER AXLE

Type	Reverse Elliot "I" Beam
Capacity	4,500 kg

WHEEL & TYRE

Tyre Size	10R22.5 Radial
Wheel	Aluminium 7.5 x 22.5 x 10 Stud fixing

FUEL TANK

200 Litres

STEERING

Type	Integral Recirculated Ball & Nut Power Assisted
Column	Tilt and Telescopic

SERVICE BRAKE

Type	Full Air
Front	Disc
Rear	Drum
Lining	Non Asbestos
Features	ABS, ASR
Park Brake	Spring Actuated Gradual Control Valve
Auxiliary	Multi Stage Hydraulic Transmission Mounted Retarder

SUSPENSION


Type	Air suspension with ECAS
Front	2 Air Bags
Rear	4 Air bags
Shocks	2 front 4 rear

ELECTRICAL SYSTEM

Alternator	24v 120 amp
Battery	2 x 150 AH / MF

DRIVER SAFETY

Mobileye advanced driver warning system optional

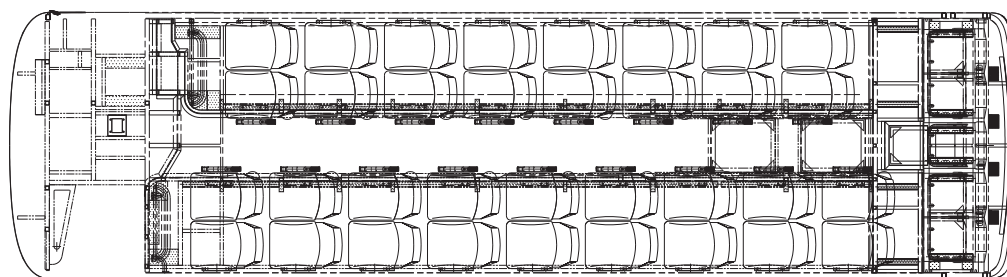

THE ABOVE SPECIFICATIONS ARE TRUE AND CORRECT AS OF 19-09-2022 AND CAN CHANGE WITHOUT NOTIFICATION.
Vehicle Dealers International reserves the right to discontinue or change the models, features, specification, options designs and prices of the products referred to in this brochure without incurring any liability whatsoever to any purchaser or prospective purchaser of any such products. Some of the items herein are optional at extra cost. Consult Yutong Bus for the latest information on models, specifications, features, prices options and availability.